





UB670 (6V7Ah)

NOTE



PHYSICAL SPECIFICATIONS

| | | |
|--------------------------------------------|--------------|--------------------------|
| Nominal Voltage Nominal Capacity (20HR) | | 6V 7.0 Ah |
| Dimensions | Length | 151 +/-1mm(5.94 inches) |
| | Width | 34 +/-1mm(1.97 inches) |
| | Height | 95 +/-2mm(3.70 inches) |
| | Total Height | 101 +/-2mm(3.94 inches) |
| Weight | | Approx. 1.3 kg (2.88lbs) |
| Standard Terminal | | F1 – Faston Tab No.187 |

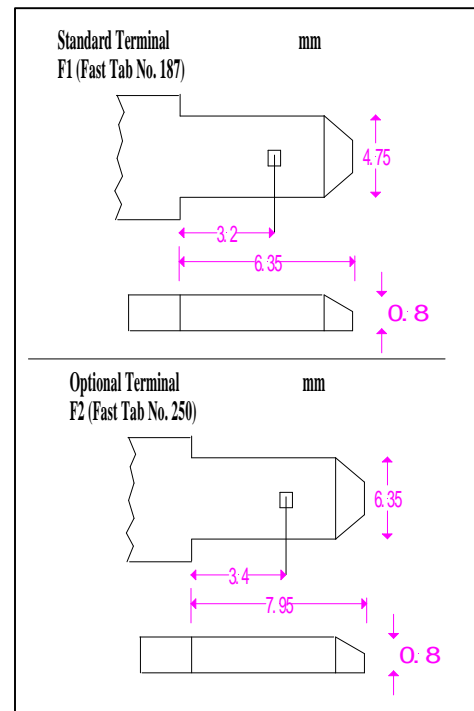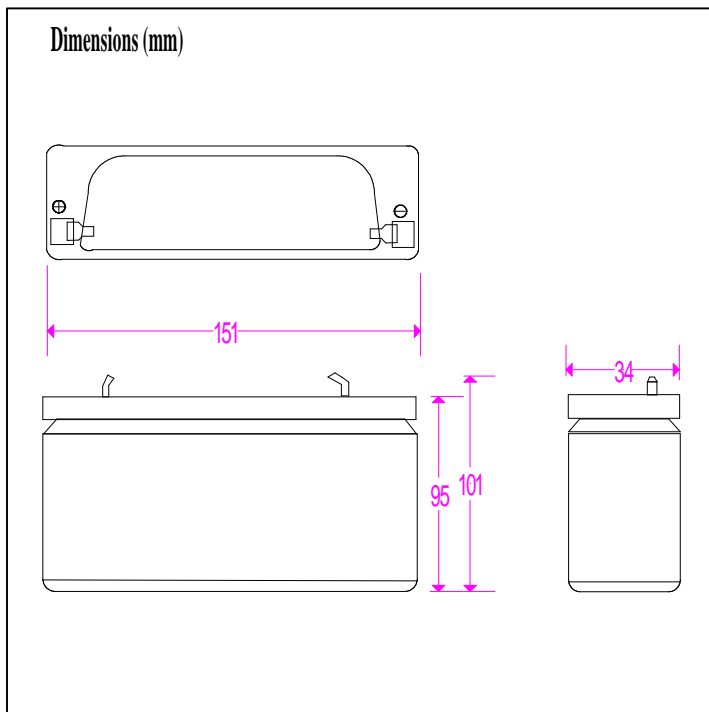



ELECTRICAL SPECIFICATIONS

| | | | | |
|--------------------------------------------------------------------|----------------------|--------|---------------------------------|-----------------------------------------------------------------------------------------------------------|
| Capacity | 20 hour rate (0.35A) | 7 Ah | Max. Discharge Current (5 sec.) | 70A |
| | 10 hour rate (0.63A) | 6.3 Ah | | Cycle |
| Capacity affected by Temperature | 5 hour rate (1.12A) | 5.6 Ah | Constant Voltage Charge | |
| | 1 hour rate (4.2A) | 4.2 Ah | | Initial Charging Current less than 2.1A Voltage 6.75V ~ 6.90V at 20°C (68°F) Temp. Coefficient-10mV/°C |
| Internal Resistance Fully charged battery (20°C, 68°F) 35milliohms | | | | |

