





UB1234 (12V3.4Ah)

NOTE



PHYSICAL SPECIFICATIONS

Nominal Voltage Nominal Capacity (20HR)		12V 3.4 Ah
Dimensions	Length	134 +/-1mm(5.28 inches)
	Width	67 +/-1mm(2.64 inches)
	Height	62 +/-2mm(2.44 inches)
	Total Height	68 +/-2mm(2.68 inches)
Weight		Approx. 1.20 kg (3.64lbs)
Standard Terminal		F1 – Faston Tab No.187

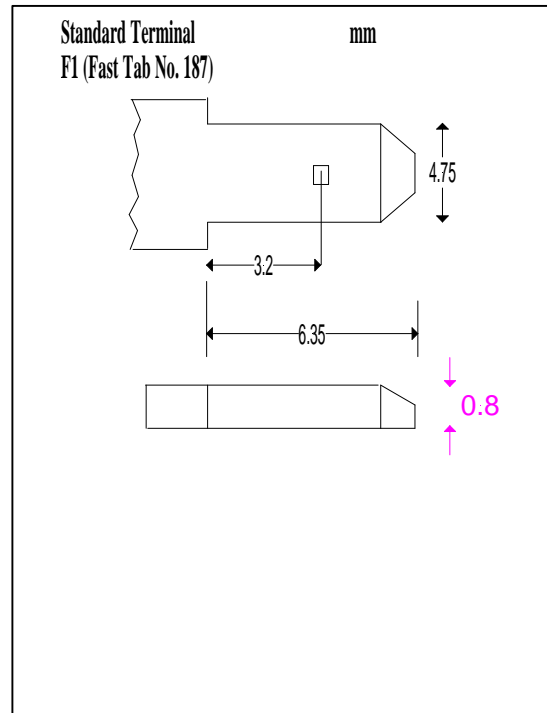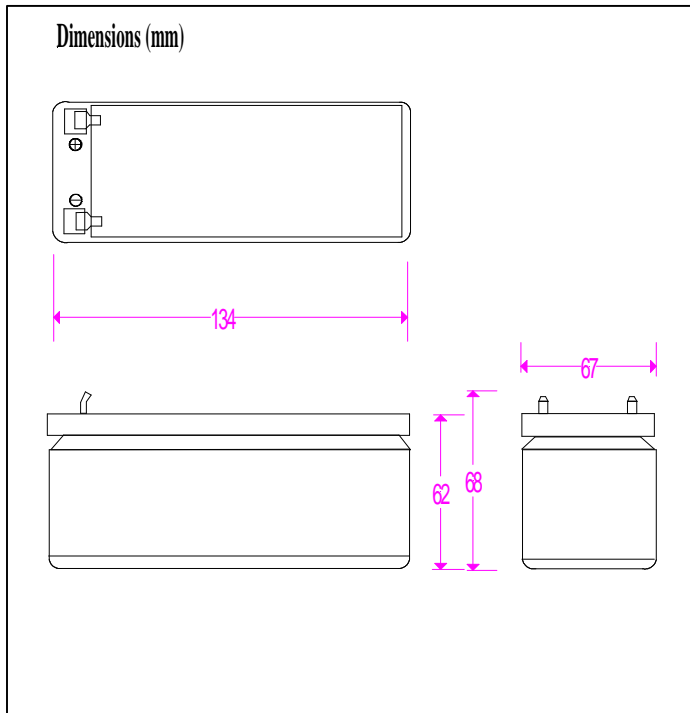



ELECTRICAL SPECIFICATIONS

Capacity	20 hour rate (0.1A)	3.4 Ah	Max. Discharge Current (5 sec.)		30A
	10 hour rate (0.18A)	2.7 Ah	Constant Voltage Charge	Cycle	Initial Charging Current less than 0.90A Voltage 14.40V ~ 15.00V at 20°C(68°F) Temp. Coefficient-30mV/°C
5 hour rate (0.32A)	2.4 Ah				
1 hour rate (1.2A)	1.8 Ah		Standby	Initial Charging Current less than 0.90A Voltage 13.50V ~ 13.80V at 20°C (68°F) Temp. Coefficient-20mV/°C	
Capacity affected by Temperature	40°C(104°F)	105%			
	20°C(68°F)	100%			
	0°C(32°F)	85%			
Internal Resistance Fully charged battery (20°C, 68°F) 70milliohms					

